



## 产品规格书



## SPECIFICATION FOR APPROVAL

CUSTOMER:

客户代码:

JSAxxxx

PRODUCT NAME:

产品名称:

HA

PRODUCT TYPE:

产品型号:

CRITICAL DIMENSIONS:

关键尺寸:

CUSTOMER P/N:

客户料号:

JS P/N:

晶赛料号:

拟制 (PREPARED)	审核 (CHECKED)	批准 (APPROVED)

客户确认 (CUSTOMER APPROVAL):

审核 (CHECKED)	批准 (APPROVED)

安徽晶赛科技股份有限公司

ANHUI JINGSAI TECHNOLOGY CO., LTD.

地址: 铜陵市经济技术开发区天门山北道2569号

ADD: No. 2569 Tianmenshan North Road, TongLing Economy &amp; Technology Development District

TEL: 0562-5885515

FAX: 0562-5886359


mail: leiw@tljsjm.cn

**1 适用范围 (SCOPE OF APPLICATION)**

本规格书用于规定 (A) 上盖。

THE SPECIFICATION CAN BE USED IN (A) QUARTZ CRYSTAL COMPONENTS COVER

A:

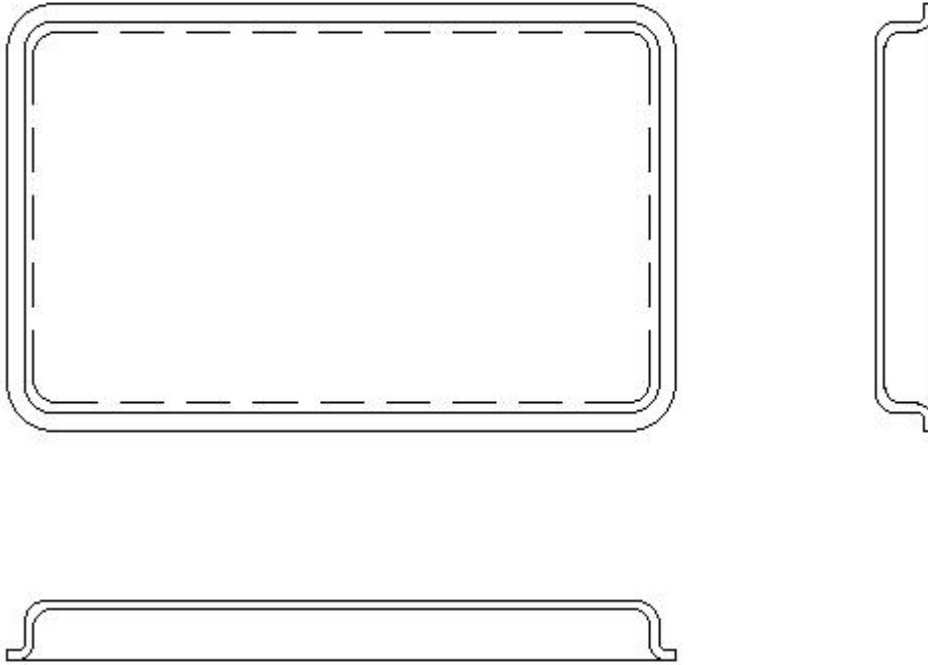**2 尺寸 (DRAWING)****3 材质 (MATERIAL)**

不锈钢，牌号：SUS304

**4 镀层 (COATING)**

无

### 5 一般性能 (Normal performance)


项 目	要求	备注
1 外观 Appearance	1. 镀层:光亮、色泽均匀,无暗斑和花纹。 <b>Coating:bright, uniform color, non dark spot and patterns.</b>	10倍放大镜下,目测。 <b>Under the conditions of 10 multiples magnifier, measure by eyes.</b>
	2. 无变形,无毛刺,无拉伤,无划伤,无凹坑等变形。 <b>Non Deformation, side of the mouth hairless puncture, non scratch at the top and pit.</b>	
	3. 无油迹、水迹、无可见尘埃等污染; 无锈蚀。 <b>Non oil and water trails, Non visible dust; Non corrosion.</b>	
2 密封性 Tightness	1. 正常条件下, 树脂粘接。 <span style="float: right;">Under normal conditions, resin adhesive.</span>	
	2. 粗漏检查: 方法一在4~6KG压力的酒精罐中保持10~15分钟取出晾干后, 引出点与上盖间绝缘电阻值在DC100V条件下, 大于或等于500MΩ。 <b>Sealing method:Keep in a alcohol can(4~6KG pressure)about10~15miniutes, in condition of DC100V, resistance value is greater than or equal to 500MΩ between lead and cover after drying out.</b> <span style="float: right;">方</span>	
	法二: 微压差法测试。(1*10 <sup>-5</sup> Pa.m <sup>3</sup> /s) <b>Micropressure difference test method (1*10<sup>-5</sup>Pa.m<sup>3</sup>/s)。</b>	
3. 细漏检查: 氦质谱法测试。(2.1*10 <sup>-9</sup> Pa.m <sup>3</sup> /s) <b>Final sealing method:Helium mass spectrometer leak test [2.1*10<sup>-9</sup>Pa.m<sup>3</sup>/s]。</b>		
3 可标识性 Identification of available	适用于激光打标。 <b>Applicable to laser marking and printing ink.</b>	

### 6 周期试验(ENVIRONMENTAL TEST)

ITEMS	CONDITIONS	SPECIFICATION
项 目	条 件	规 格
1 盐 雾 salt	35℃时, 在5%的盐雾条件下保存16小时。 <b>At 35 °C, 16 hours preservation in condition of 5% salt.</b>	N/A
2 高温贮存 High-temperature storage	125℃温度条件下, 洁净环境中保持72小时。 <b>At 125°C, keep 72hours in clean environment.</b>	N/A
3 低温贮存 Low-temperature storage	-40℃温度条件下, 洁净环境中保持72小时。 <b>At -40°C, keep 72hours in clean environment.</b>	N/A
4 稳态湿热 Steady-state heat	相对湿度90%RH, 温度40℃条件下保持72小时。 <b>In condition of 90% relative humidityRH and 40 °C, keep 72 hours.</b>	N/A


## 7 包装(PACKAGE)

- 包装袋(plastic bag)

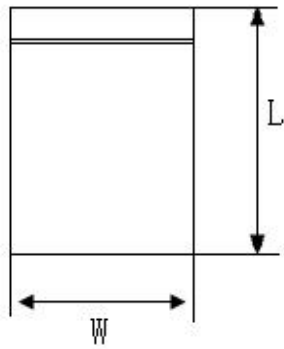

30000pcs/Bag

- 包装盒 (Inner Box)

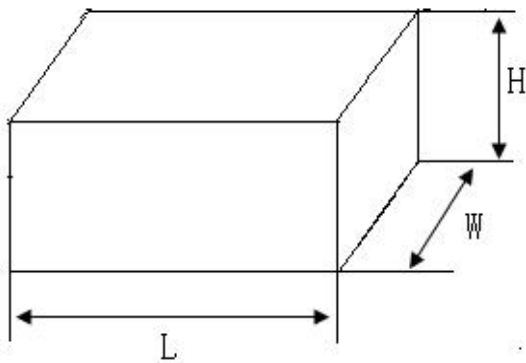

10Bags/Box

- 包装尺寸(单位: mm)及数量标准 Package & Quantity

型号 Type	尺寸 Size (L*W*H)	包装数量 Quantity
包装袋 Bags	130*80*0.1	30000pcs
包装盒 Inner Box	305*170*85	300000pcs

- 包装标签内容 Contents of Packaging Labels

- \* 产品型号 (HOLDER TYPE)
- \* 数量 (QUANTITY)
- \* 生产批号 (LOT.)
- \* 检验日期 (DATE)
- \* 检验员 (QUALITY CHECKER)