



## 产品规格书



## SPECIFICATION FOR APPROVAL

CUSTOMER:

S/TXXXX

客户代码:

PRODUCT NAME:

屏蔽罩模组

产品名称:

CRITICAL DIMENSIONS:

XX.XX\*XX.XX\*X.XX

关键尺寸:

CUSTOMER P/N:

客户料号:

拟制 (PREPARED)	审核 (CHECKED)	批准 (APPROVED)

客户确认 (CUSTOMER APPROVAL):

审核 (CHECKED)	批准 (APPROVED)

安徽晶赛科技股份有限公司

ANHUI JINGSAI TECHNOLOGY CO., LTD.

地址: 铜陵市经济技术开发区天门山北道2569号

ADD: No. 2569 Tianmenshan North Road, TongLing Economy &amp; Technology Development District

TEL: 0562-5885515

FAX: 0562-5886359

mail: leiw@tljsjm.cn

# 修改记录

## RECORD OF REVISION


Customer P/N:			SPEC 产品规格:		
REV NO.	REASON	CONTENT	DATA OF APPROVAL	CHECKED	REMARKS
版本号	原因	内容	确认日期	核对	备注

## 1 适用范围 (SCOPE OF APPLICATION)

本规格书用于规定屏蔽罩。

THE SPECIFICATION CAN BE USED IN (A) SHIELD COVER

## 2 尺寸 (DRAWING)

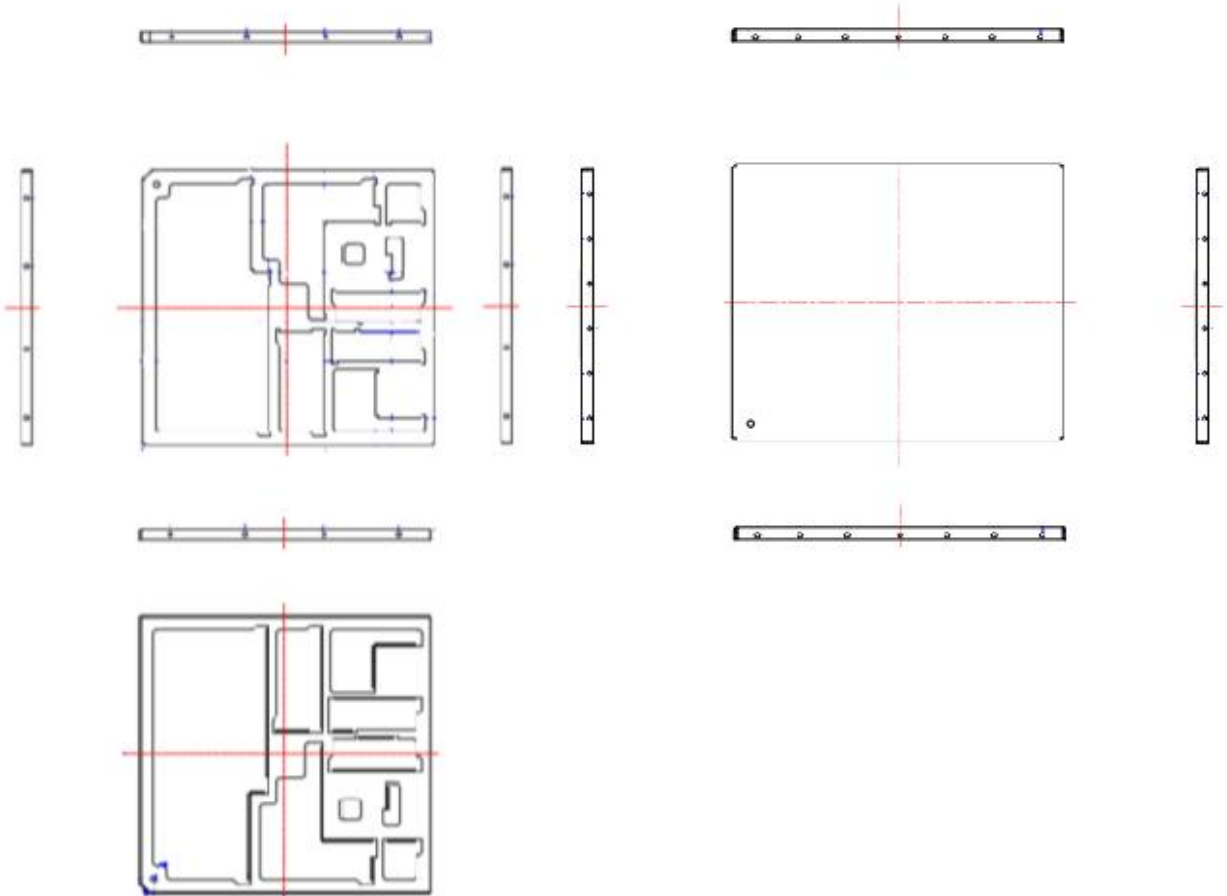

## 3 材质 (MATERIAL)

洋白铜

## 4 包装 (PACKAGE)

- 包装方式 Packaging
- 载带 carrier      □ 吸塑托盘 Plastic tray

- 包装标签内容 Contents of Packaging Labels

- \* 产品型号 (HOLDER TYPE)
- \* 数量 (QUANTITY)
- \* 生产批号 (LOT.)
- \* 检验日期 (DATE)

5 一般性能 (Normal performance)

项 目		要求	备注
1	外观 Appearance	1. 无变形,无毛刺,无拉伤,无划伤,无凹坑等变形。 <b>Non Deformation, side of the mouth hairless puncture, non scratch at the top and pit.</b>	目测。 measure by eyes.
		2. 无油迹、水迹; 无锈蚀。 <b>Non oil and water trails, Non corrosion.</b>	
2	可焊性 Weldability	将样品焊锡区浸渍在以下条件的焊锡槽中: 焊锡: Sn-3Ag-0.5Cu, 助焊剂: 活性助焊剂, 焊锡温度: 245±5℃ 浸渍时间: 3±0.5second。 浸锡部分表面须95%以上沾锡良好 The soldering section if the sample shall be dipped in the solder-filled tester of the following condition: Solder: Sn-3Ag-0.5Cu, Flux: Activation flux, Solder temperature: 245±5℃ Immersion period: 3±0.5second。 More than 95% of immersion area shall be covered with solder	目测。 measure by eyes.
3	尺寸 size	产品结构及尺寸须符合图纸设计要求。 The product structure and size must meet the design requirements of the drawing.	卡尺 calipers